


SIZE: DW= -		DH= -	
MOTOR LOCATION:		RIGHT	LEFT
CONTROL BOX LOCATION:		RIGHT	LEFT
CONTROL BOX TYPE:		3PHASE	
VOLTAGE: 1208V	230-240V	360-480V	575V
WIRING:			NXT
CABLE OUTLET LOCATION:			
PANEL AREA:			
QTY. OF VISION PANELS			STARTING AT
QTY. OF PERFORATED PANELS			STARTING AT
PANEL COLOR:		BLUE	ORANGE
		YELLOW	RED
		GREY	WHITE
OPTIONS:			
NXT LINK KEYPAD		NO	LEFT
			RIGHT
3 BUTTON PUSH STATION			-
INDUCTION LOOP SYSTEM			-
RADAR MOTION SENSOR			-
NOTES:			


- 1.) STEP UP TRANSFORMER REQUIRED FOR SUPPLY VOLTAGES LESS THAN 230VAC (TO A MINIMUM OF -5%).
- 2.) STEP DOWN TRANSFORMER REQUIRED FOR SUPPLY VOLTAGES GREATER THAN 480VAC (TO A MAXIMUM OF +5%).
- 3.) TRANSFORMER OPTIONAL

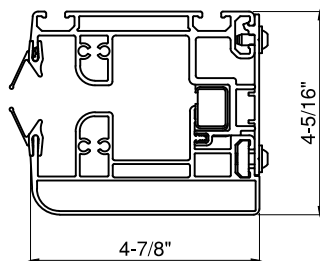

TRACK DETAIL

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE

***POSSIBLE CABLE OUTLET POSITIONS

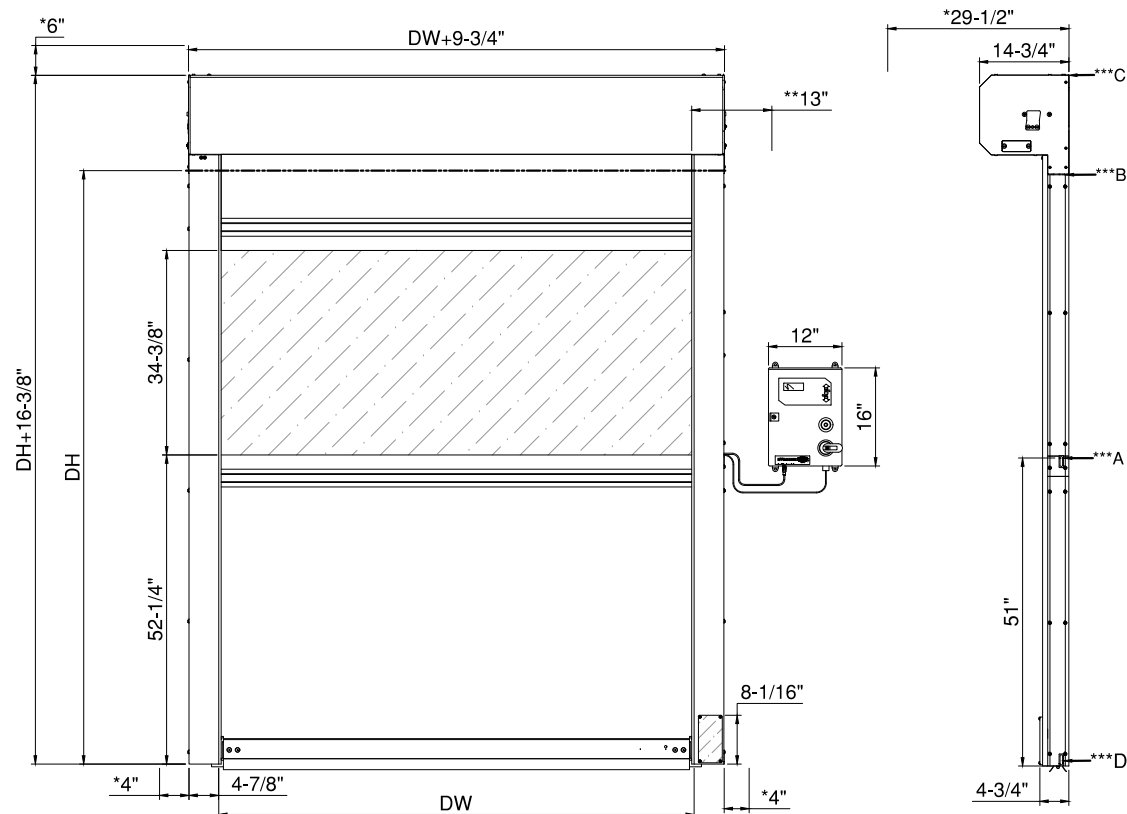**HÖRMANN**

117 STARPOINTE BOULEVARD
BURGETTSTOWN, PA 15021-9506
PH: +1 (800) 365-3667 FAX: 724.385.9151
www.hormann.us

HIGH PERFORMANCE DOOR SPECIFICATIONS

MODEL: SC1500 MP

DRAWN:

ZAW

DATE: _____

6/12/2026