


# Product Data Sheet

# HÖRMANN

## Clima Tech 4400

Urethane Insulated 1½" Residential 25 Gauge Steel Door

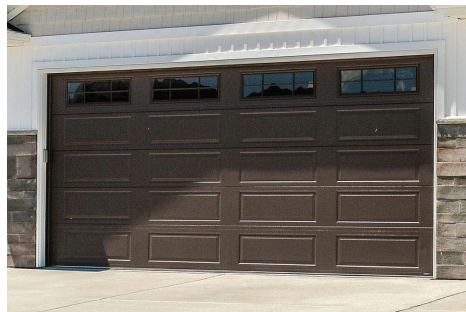

The virtually maintenance-free Clima Tech features 1½" thick panels constructed with polyurethane foam insulation bonded to superior grade galvanized steel.

- Tongue & groove section joints
- Heavy duty 3-layer sandwich construction with injected polyurethane foam insulation bonded to steel front and back 100% CFC & HCFC free
- R-Value: 15.7 (U-Factor: 0.21)
- Available section heights: 18" & 21"
- 12" radius track standard, 15" radius optional
- 14 Gauge hinges
- 11 Ball bearing roller, 2 long for Safety Bottom Fixture
- Woodgrain embossing
- Stucco embossing (Micro Ribbed only)
- Painted end caps
- Limited lifetime warranty on sections
- 4 year hardware warranty
- 3 year torsion spring warranty

Door Specification	Description
Standard Door Size	Width: 6' - 18' Height: 6' - 14'
Material Thickness / Door Type	Polyurethane T&G 1 ½" - 0.015"nom
Door Design	Short Raised, Long Raised, Country, Cottage, Medley, Flush & Microgroove
Texture	Woodgrain Stucco - Microgroove
Colors	Standard: White, Almond, Sandstone, Brown & Black
Galaxy Paint	Optional
Insulation	Polyurethane w/ steel backer
Thermal Resistance (R-value)	15.7
Heat Transfer Coefficient (U-factor)	0.209
Air Infiltration Value (cfm/ft²)	0.12
Door Sections Only (DSO) Option	Yes
Springing	Torsion any height w/ extension up to 8' high in door height
Track Options	All track options
Builder's Grade	N/A
Window Options	Short/Long Commercial windows only for MG Slimline
Glass Options	Annealed Standard Privacy, Grey, Bronze, Obscure, Glue Chip, Satin Etch, and Mistlite
Windload	Yes
Hardware	16 gauge hardware and 11 ball bearing rollers, safety bottom brackets
Strutting	2 ¼" Strutting used up to 16'2" and 3" used after
Manufacturer Warranty	Limited lifetime sections, 4 year hardware, 3 year springs